


說明: △:備注 ◇:版本變更 ①:尺寸序號 ■:重點尺寸

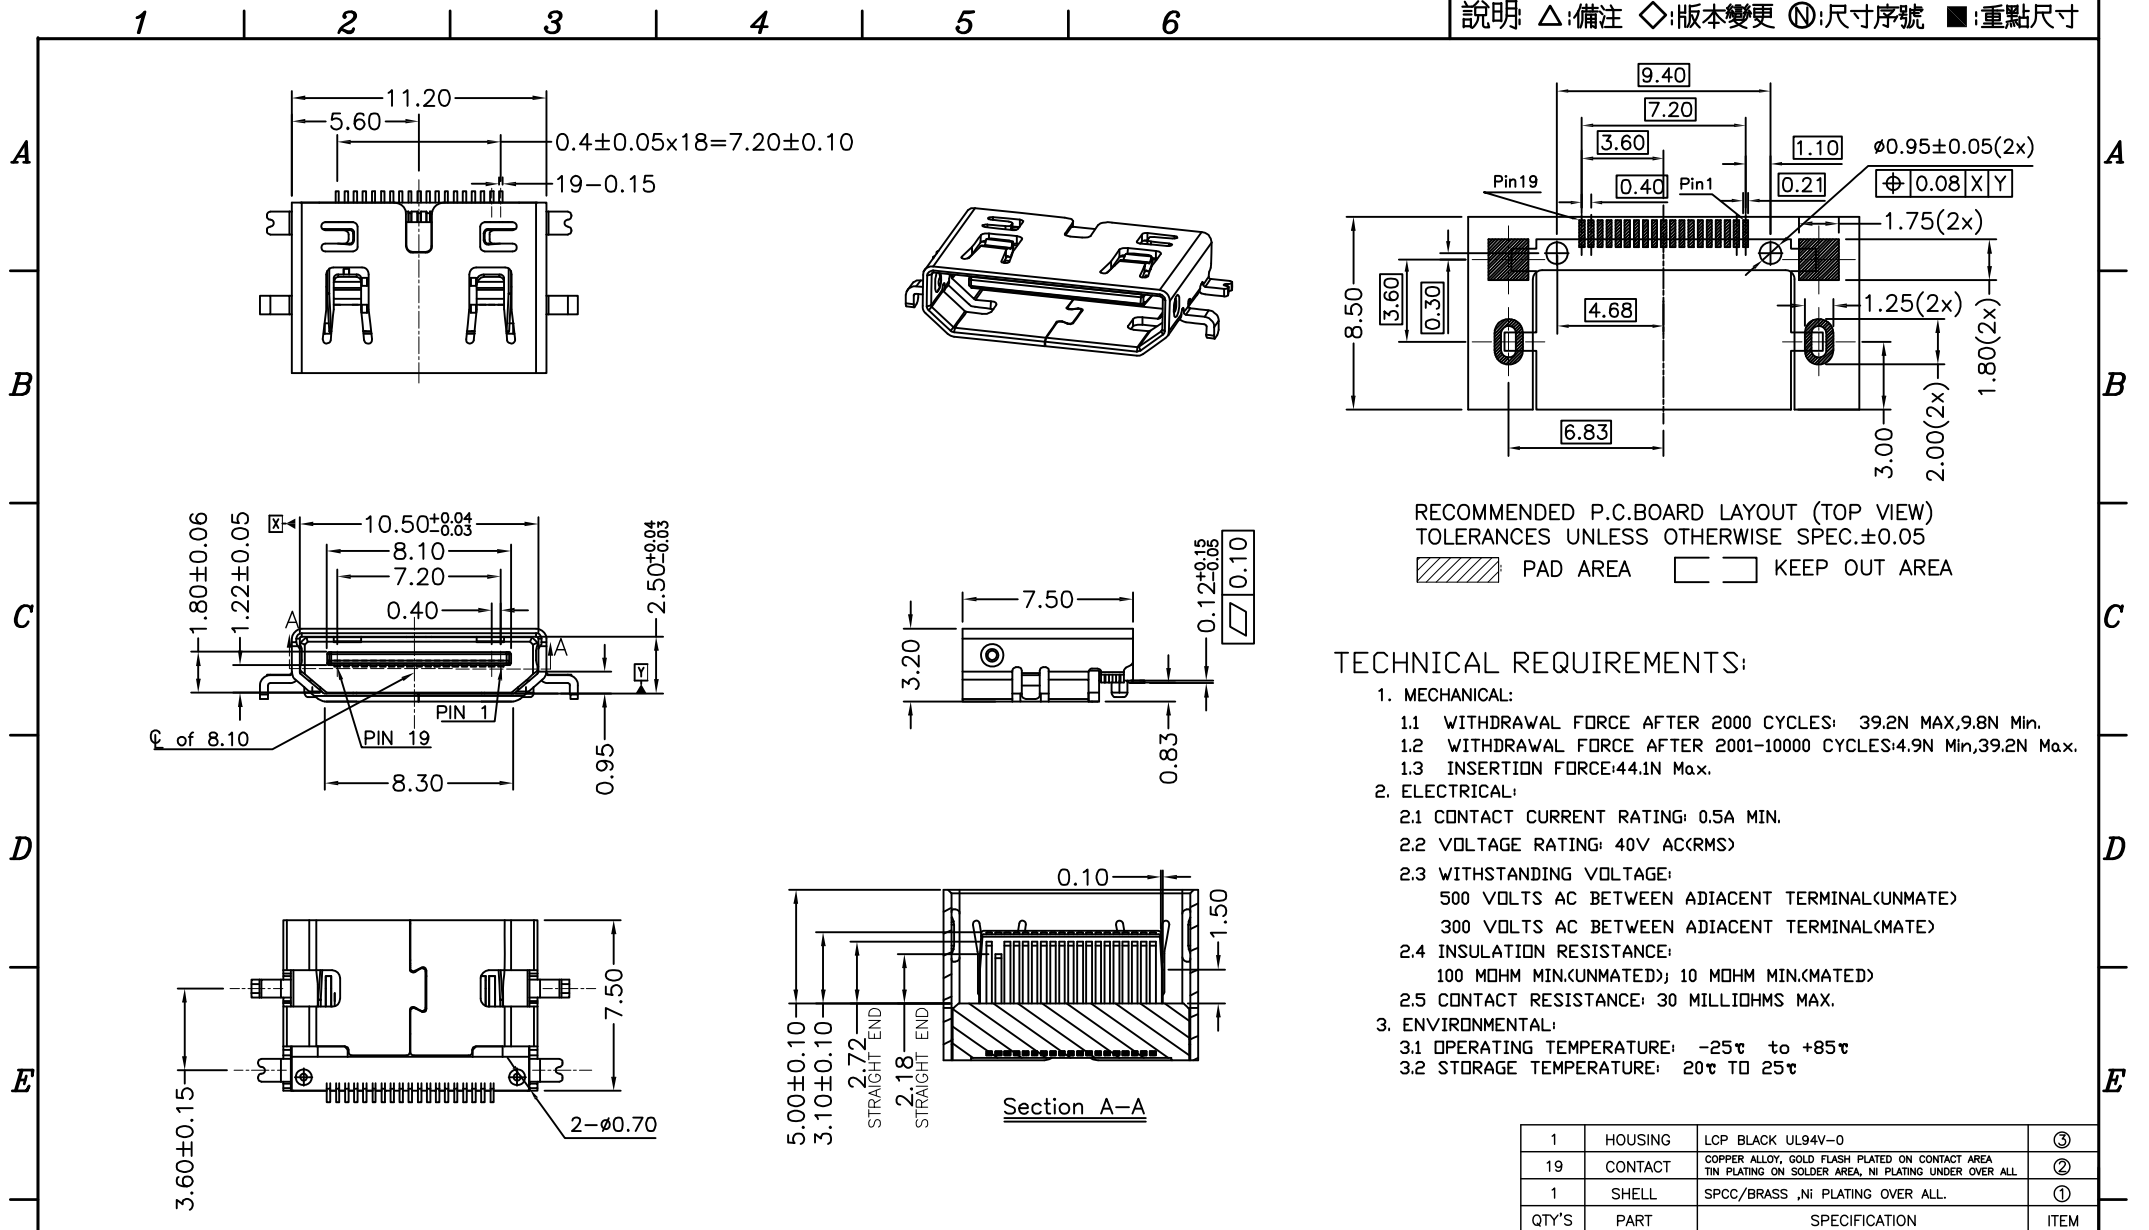

TECHNICAL REQUIREMENTS:

1. MECHANICAL:
 - 1.1 WITHDRAWAL FORCE AFTER 2000 CYCLES: 39.2N MAX,9.8N Min.
 - 1.2 WITHDRAWAL FORCE AFTER 2001-10000 CYCLES:4.9N Min,39.2N Max.
 - 1.3 INSERTION FORCE:44.1N Max.
2. ELECTRICAL:
 - 2.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 2.2 VOLTAGE RATING: 40V AC(RMS)
 - 2.3 WITHSTANDING VOLTAGE:
 - 500 VOLTS AC BETWEEN ADIACENT TERMINAL(UNMATE)
 - 300 VOLTS AC BETWEEN ADIACENT TERMINAL(MATE)
 - 2.4 INSULATION RESISTANCE:
 - 100 MOHM MIN.(UNMATED); 10 MOHM MIN.(MATED)
 - 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
3. ENVIRONMENTAL:
 - 3.1 OPERATING TEMPERATURE: -25℃ to +85℃
 - 3.2 STORAGE TEMPERATURE: 20℃ TO 25℃

QTY'S	PART	SPECIFICATION	ITEM
1	HOUSING	LCP BLACK UL94V-0	③
19	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	②
1	SHELL	SPCC/BRASS ,NI PLATING OVER ALL.	①

版本	變更內容	日期
千川	MODIFIXATION	DATE

 东莞市千川电子有限公司
DONG GUAN QIAN CHUAN ELECTRONIC CO.,LTD

公差	數量	制圖	潘富国	品名	Mini HDMI 19PIN 母座沉板式SMT L=7.50mm 外壳前插后贴 沉板板下0.80mm		
TOLERANCE	QUANTITY	DRAW/IN	審核	TITLE	SPECIFICATION		
X ± 0.35	單位	mm	QMS	料號	QHCF1-1-GFBN0R40		
XX ± 0.25	UNIT	1:1	LGL	PART NO.			
XXX ± 0.15	比例		核准	MATERIAL			
X° ± 3°	圖幅	44	角法	頁數	1 OF 1	顏色	
X° ± 1.5°	SIZE		PROJ.	SHEET		COLOR	