說明: △:備注 ◇:版本變更 Ⓝ:尺寸序號 :重點尺寸

RoHS COMPLIANT

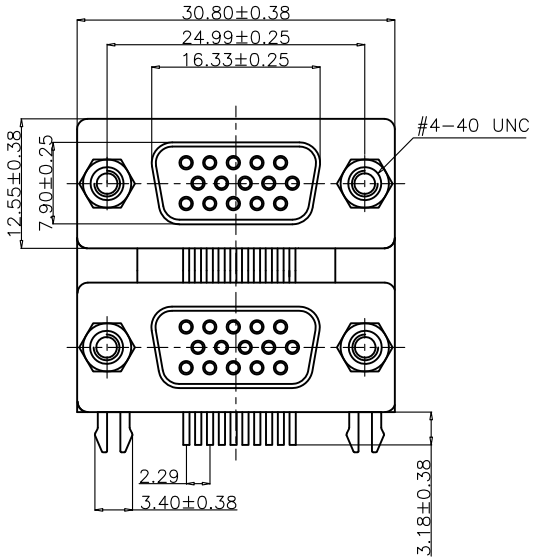

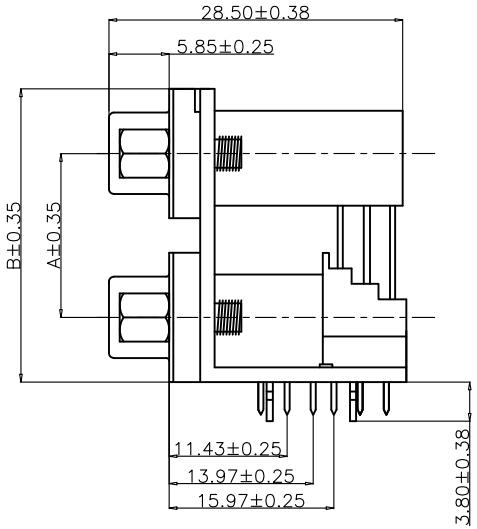

SPECIFICATIONS

1.1 Voltage: 250 VAC(RMS) Max.
1.2 Current Rating: 3 Ampere per Contact
1.3 Contact Resistance: 25 Milliohms Max.
1.4 Insulation Resistance: 5000 Megohms Min.
1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
1.6 Total Mating Force: 6.0 Kgf Max.
1.7 Total Unmating Force: 1.2 Kgf Min.
1.8 Operating Temperature: -55°C to +85°C

DIM A	DIM B
15.88	28.43
19.05	31.60

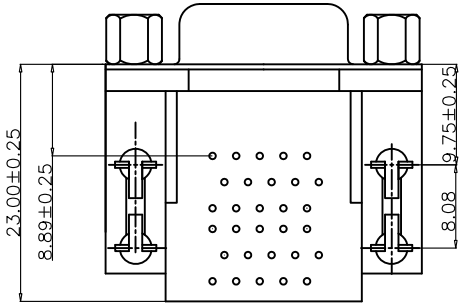

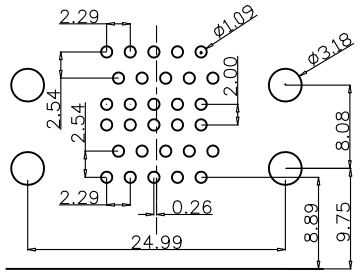

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE:±0.05

QTY'S	PART	SPECIFICATION	ITEM
2	BOARD LOCKS	BRASS ,Ni PLATING OVER ALL.	⑦
2	SCREW	STEEL ,Ni PLATING OVER ALL.	⑥
2	FISH FORK	SPCC,Tin PLATING OVER ALL.	⑤
2	COVER	HIGH TEMPERATURE PLASTIC UL94V-0	④
2	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	③
30	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	②
2	SHELL	SPCC,Ni PLATING OVER ALL.	①

版本 千川	變更內容 MODIFIXATION	日期 DATE
00	新整理	2020.10.28

東莞市千川电子有限公司
DONG GUAN QIAN CHUAN ELECTRONIC CO.,LTD

公差 TOLERANCE	數量 QUANTITY		制圖 DRAWIN	潘红国	品名 TITLE	HDR8.89 15Pin母座 双层卧式DIP 铆锁4.8螺丝 间距15.88/19.05mm	
.X ± 0.35	單位 UNIT	mm	審核 CHECKED	TOMS	料號 PART NO.	QHR8GB3-GFPL0P23	
.XX ± 0.25	比例 SCALE	1:1	核准 APPROVE	LGL	材质 MATERIAL		图号 DRAW NO.
.XXX± 0.10	圖幅 SIZE	A4	角法 PROJ。		頁數 SHEET	1 OF 1	颜色 COLOR
X° ± 2°							
.X° ± --							